

FIGURE 4A


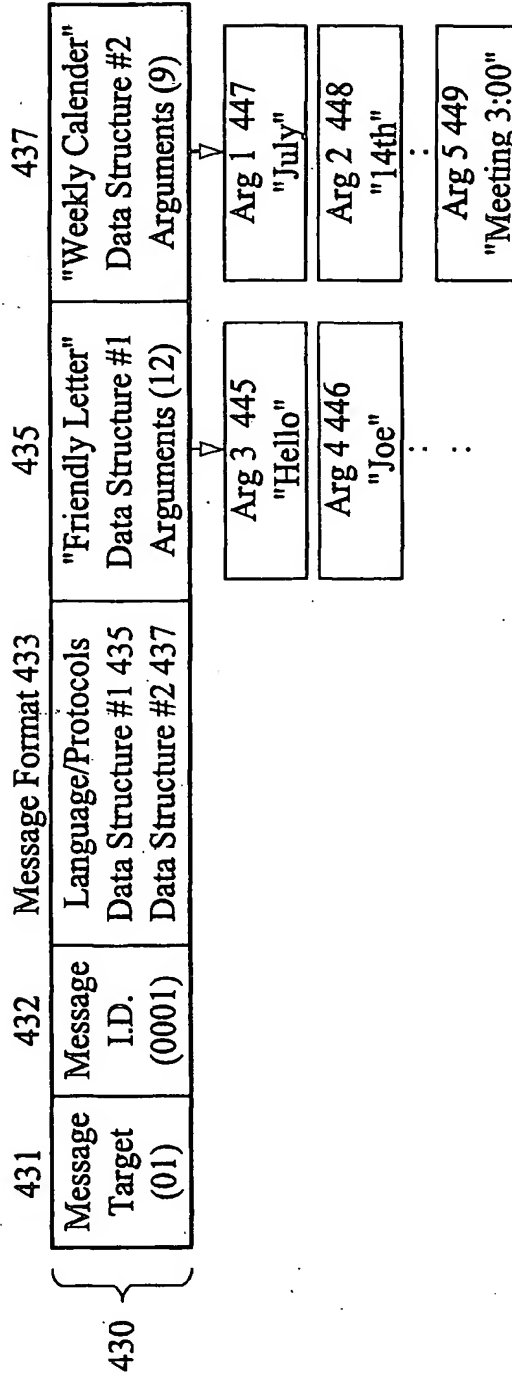


FIGURE 4B



Receiver Computer 590




Receiver formatted  
message:  
{impl. f(a, b, c)}  
580

Demarshal arguments  
570

Decode difference  
message arguments  
560

500

Sender Computer 510



Sender formatted  
message:  
{obj. f(a, b, c)}  
520

Marshal arguments  
530

Construct difference  
message  
{Arguments}  
540

Transport marshalled  
difference message  
arguments  
550

FIGURE 5